



Itthon

INNOVATION

Calefacción de Gas





FireSticker

- Stand Square Flame Heater, wheels included.
- powder coated in different color
- Base:495X495X92(H)mm
- Lower Support:880mm in length(4pcs)
- Upper Support:1300mm in length(4pcs)
- Protective Guard:(155+333)X1215(H)mm(4pcs)
- 4 Panel:(342+464)x849mm(H)(4pcs)
- Glass tube:Dia.100x1254x3mm
- Reflector: 460x460x52(H)mm
- Flame Screen assembly:182x182x134(H)mm
- Total Height: 2270mm(H)
- Power:13KW; Flux: 945g/hr.
- Fuel: Propane or Butane or LPG gas
- Quartz glass tube plus: USD 25

Model	Power	G. W/N.W(kg)	Giftboxsize(mm)	PCS/20	PCS/40	PCS/40HQ
BFH-A-PC	13KW	26.0/22.0	1370x770x180	139	280	308



ND001

- Stand Square Flame Heater, wheels included.
- Stainless steel #202
- Base:495X495X92(H)mm
- Lower Support:880mm in length(4pcs)
- Upper Support:1300mm in length(4pcs)
- Protective Guard:(155+333)X1215(H)mm(4pcs)
- 4 Panel:(342+464)x849mm(H)(4pcs)
- Glass tube:Dia.100x1254x3mm
- Reflector: 460x460x52(H)mm
- Flame Screen assembly:182x182x134(H)mm
- Total Height: 2270mm(H)
- Power:13KW; Flux: 945g/hr.
- Fuel: Propane or Butane or LPG gas
- Quartz glass tube plus: USD 25

Model	Power	G. W/N.W(kg)	Giftboxsize(mm)	PCS/20	PCS/40	PCS/40HQ
BFH-A-SS	13KW	26.0/22.0	1370x770x180	139	280	308



ELITE

Specification:

175 SQFT Heating Area
 20 lbLPG Tank Required
 Stainless steel, Black, Brown hammered, silver hammered and mixed stainless steel
 Total Height: 2210mm
 Power: 13,000W
 Fuel: Propane or Butane Gas Only
 Flux: 945g/hr
 Piezoelectric Ignition
 Anti-tilt Switch Variable Gas Control Valve
 Automatic Shut-off Device

Packing Type	Outer Packing	G.W/N.W	20'			40'			40' HC		
			20'	40'	40' HC	20'	40'	40' HC	20'	40'	40' HC
With Four Segment K/D Reflector (1CTN/PC)	46x46x118.5cm	24/22KG	125pcs	250pcs	250pcs						



P1201

- Gas type: Propane, butane and mixtures (LPG)
- Heat output: max. 8kW
- Consumption: 576-599g/h
- Include tilt switch and flame failure device
- The fire is visible from all sides
- Great illumination and heating source
- Robust, resistant and light at the same time
- Electric ignition (no AAA battery)
- Portable thanks to its four lockable wheels
- Abt 5.5kg Clear tempered fireglass included
- Product Size: 469*469*1390mm
- Gas cylinder capacity: Max.13kg

Model	Power	G. W/N.W(kg)	Giftboxsize(mm)	PCS/20	PCS/40	PCS/40HQ
P1201	8KW	45.0/39.0	530x530x890	108	230	280

LFH-A-PC

- Gas type: Propane, butane and mixtures (LPG)
- Heat output: max. 8kW
- Consumption: 576-599g/h
- Include tilt switch and flame failure device
- The fire is visible from all sides
- Four-sided tempered top glass
- Great illumination and heating source
- Robust, resistant and light at the same time
- Electric ignition (no AAA battery)
- Portable thanks to its four lockable wheels
- Abt 5.5kg Clear tempered fireglass included
- Product Size: 469*370*1094mm
- Gas cylinder capacity: Max.13kg



Model	Power	G. W/N.W(kg)	Giftboxsize(mm)	PCS/20	PCS/40	PCS/40HQ
P1201C	8KW	36.0/30.0	530x530x890	108	230	280

P1201

- Gas type: Propane, butane and mixtures (LPG)
- Heat output: max. 8kW
- Consumption: 576-599g/h
- Include tilt switch and flame failure device
- The fire is visible from all sides
- Four-sided tempered top glass
- Great illumination and heating source
- Robust, resistant and light at the same time
- Electric ignition (no AAA battery)
- Portable thanks to its four lockable wheels
- Abt 5.5kg Clear tempered fireglass included
- Product Size: 469*370*1296mm
- Gas cylinder capacity: Max.13kg



Model	Power	G. W/N.W(kg)	Giftboxsize(mm)	PCS/20	PCS/40	PCS/40HQ
P1201C	8KW	41.0/35.0	530x530x890	108	230	280




P1201B

GAS TYPE: PROPANE, BUTANE AND MIXTURES (LPG)HEAT OUTPUT: MAX. 8KW CONSUMPTION: 576-599G/H INCLUDE TILT SWITCH AND FAME FAILURE DEVICE THE FIRE IS VISIBLE FROM ALL SIDES FOUR-SIDED TEMPERED TOP GLASS GREAT ILLUMINATION AND HEATING SOURCE ROBUST, RESISTANT AND LIGHT AT THE SAME TIMEELECTRIC IGNITION (NO AAA BATTERY) PORTABLE THANKS TO ITS FOUR LOCKABLE WHEELSABT 5.5KG CLEAR



P1201A

GAS TYPE: PROPANE, BUTANE AND MIXTURES (LPG)HEAT OUTPUT: MAX. 8KW CONSUMPTION: 576-599G/H INCLUDE TILT SWITCH AND FAME FAILURE DEVICE THE FIRE IS VISIBLE FROM ALL SIDES FOUR-SIDED TEMPERED TOP GLASS GREAT ILLUMINATION AND HEATING SOURCE ROBUST, RESISTANT AND LIGHT AT THE SAME TIMEELECTRIC IGNITION (NO AAA BATTERY) PORTABLE THANKS TO ITS FOUR LOCKABLE WHEELSABT 5.5KG CLEAR

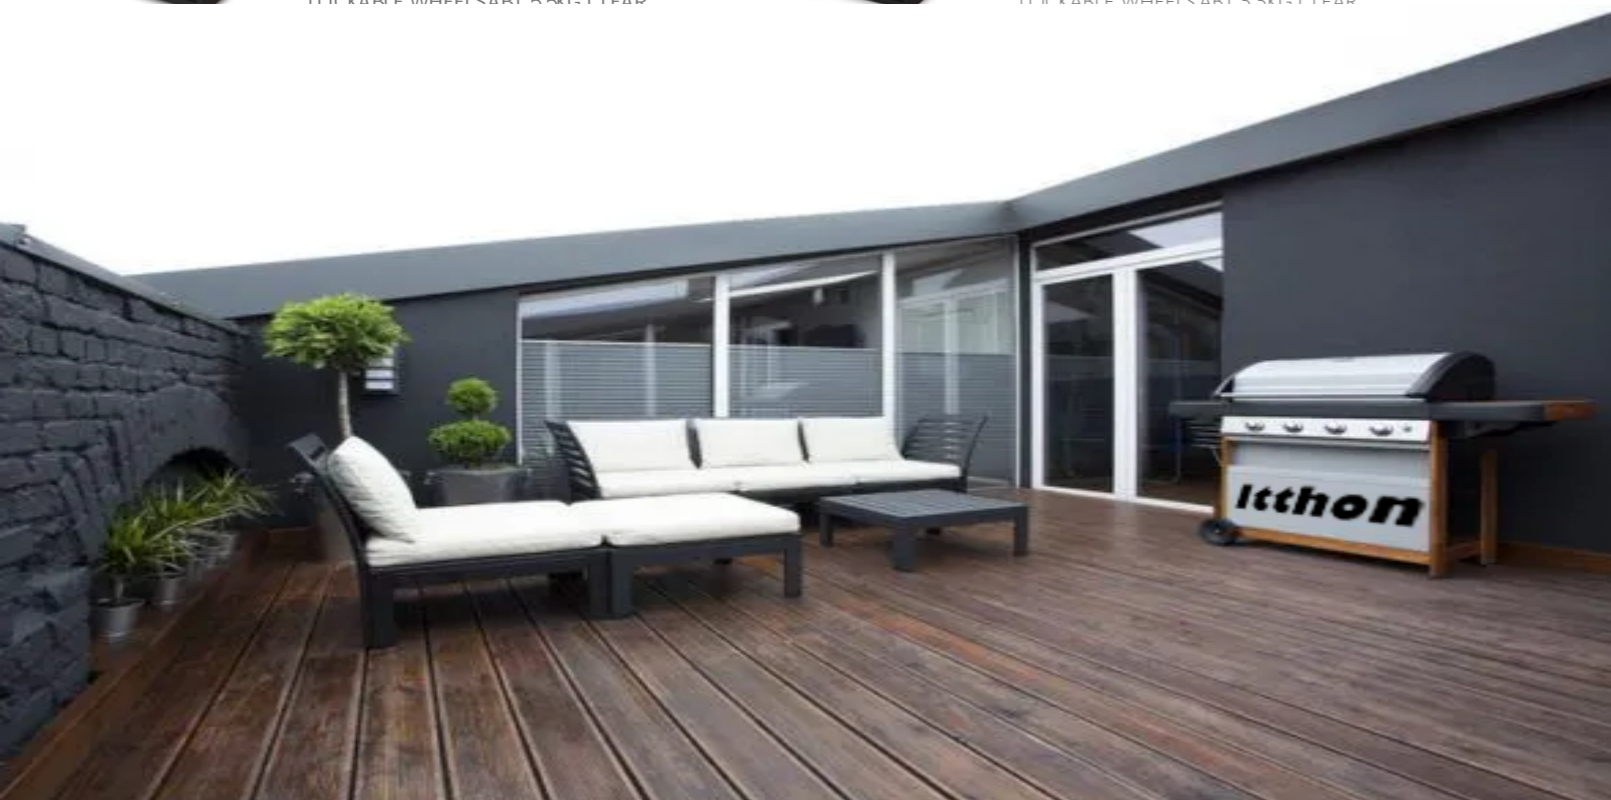

Estufa Gas infrarrojos

- Potencia:4.2KW
- Encendedor de inicio incluido
- Cubierta de acero pintado
- Quemadores cerámicos 3 und
- Protección a la falta de llama
- Detección de la falta de oxígeno
- Ignición con sistema piezo-electrico
- Regulador y manguera incluido (según modelo)
- Tipo de gas :LPG/Butano/Propano/gas natural

REF:ITT-214A/B/C
UNE-EN 449:2003+A1:2007
UNE-EN 437:2019



Caja (mm)	G .W./N.W.(kg)	Export carton(mm)	20'/40'/40HQ
430x315x745	8.6/7.6	430x315x745	310/650/710



P1201C

GAS TYPE: PROPANE, BUTANE AND MIXTURES (LPG)HEAT OUTPUT: MAX. 8KW CONSUMPTION: 576-599G/H INCLUDE TILT SWITCH AND FAME FAILURE DEVICE THE FIRE IS VISIBLE FROM ALL SIDES FOUR-SIDED TEMPERED TOP GLASS GREAT ILLUMINATION AND HEATING SOURCE ROBUST, RESISTANT AND LIGHT AT THE SAME TIMEELECTRIC IGNITION (NO AAA BATTERY) PORTABLE THANKS TO ITS FOUR LOCKABLE WHEELSABT 5.5KG CLEAR TEMPERED FIREGLASS INCLUDED PRODUCT SIZE: 469*370*1296MM GAS CYLINDER CAPACITY: MAX.13KG



P1201B

GAS TYPE: PROPANE, BUTANE AND MIXTURES (LPG)HEAT OUTPUT: MAX. 8KW CONSUMPTION: 576-599G/H INCLUDE TILT SWITCH AND FAME FAILURE DEVICE THE FIRE IS VISIBLE FROM ALL SIDES FOUR-SIDED TEMPERED TOP GLASS GREAT ILLUMINATION AND HEATING SOURCE ROBUST, RESISTANT AND LIGHT AT THE SAME TIMEELECTRIC IGNITION (NO AAA BATTERY) PORTABLE THANKS TO ITS FOUR LOCKABLE WHEELSABT 5.5KG CLEAR TEMPERED FIREGLASS INCLUDED PRODUCT SIZE: 469*370*1296MM GAS CYLINDER CAPACITY: MAX.13KG